BETE


EPSJ1808LI

Insulated Chain Saw



Insulated Chain Saw

EPSJ1808LI

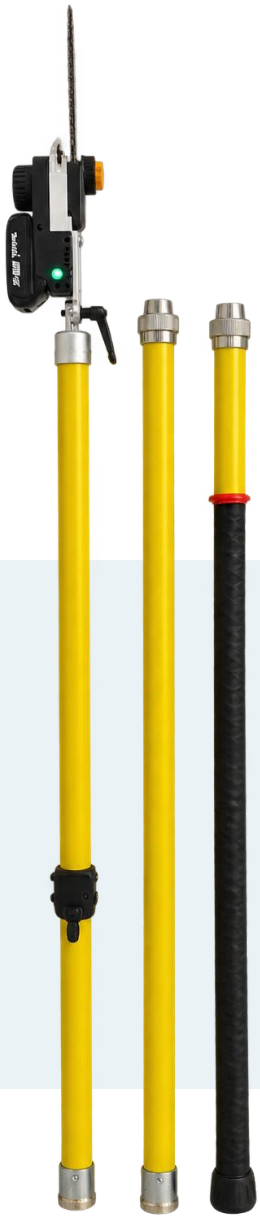

41.7% Lighter
Direct-Drive Design

Insulated Design
Enhanced Safety

Modular Pole
Quick Assembly

Wireless Control
Flexible Positioning

Product Overview



Designed for routine defect elimination and tree-trimming work near energized operatinglines, including power transmission and distribution lines, railway contact networks, andthrough automatic block lines.

Operating methods: short-stick operation from an aerial work platform, or ground operation with a hot stick.

Specifications

Product Parameter Information

Chain-saw cutting / shear dia.	≤10 cm
Chain speed	8 m/s
Main-unit dimensions	Total length 40 cm (guide-bar protrusion 20 cm), width 8 cm, thickness 10.5 cm
Main-unit weight	Saw head without battery: 987 g; battery: 495 g

About Remote-controller

Dimensions	8.5 x 6 x 5.2 cm
Weight	77 g
Switch type	Travel controller
Mounting method	Quick-release installation in 10 s
Compatible pole dia.	25-36 mm
Delay	100 ms

Functions: Full-charge and low-battery indicators, communication connection indicator, program anti-misoperation double-click trigger protection, and mechanical lock gear protection

About Battery

Dimensions	113 x 75 x 45 cm
Weight	380 g
Capacity	18 V, 2 Ah
Loaded endurance	At least 40 times
No-load endurance	20 min

*Per battery, cutting 10 cm-diameter logs.

Standard Configuration



Main saw head
x1 pc



Three-section 4 m operating pole
x1 set



Remote controller
x1 pc



Drive battery
x2 pcs

Drive-battery charger	1 pc	Canvas storage bag	1 pc
Remote-controller charging cable	1 cable	8 in guide bar	1 pc
Three-proof storage case	1 pc	8 in chain	2 pcs